



XS-80S-2000 Full automatic deburring machine

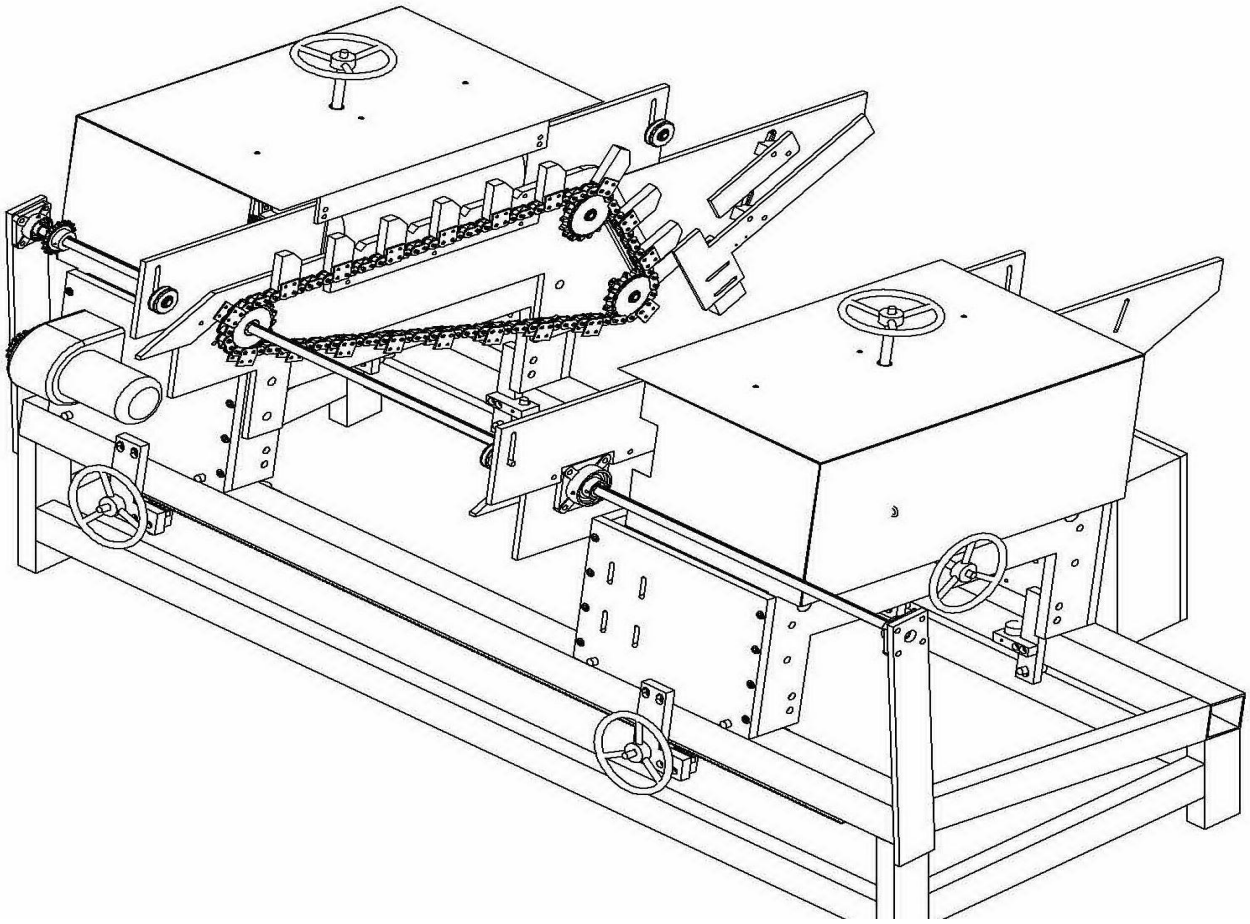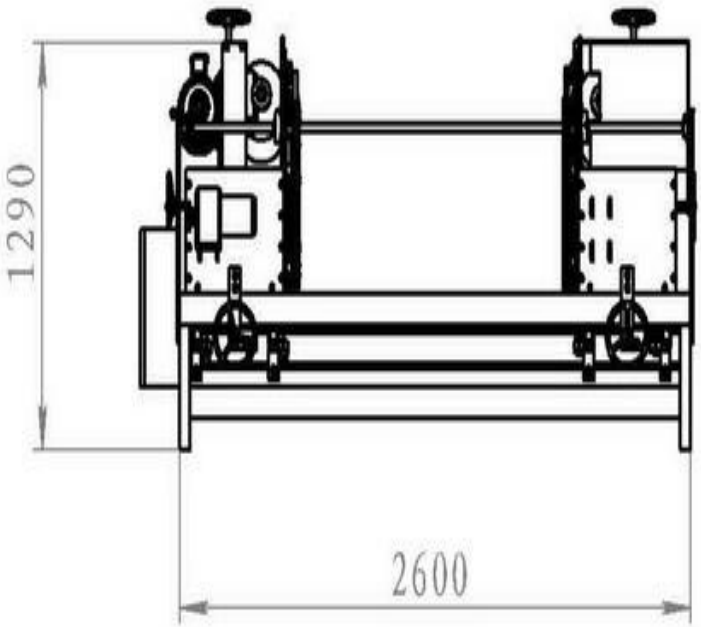

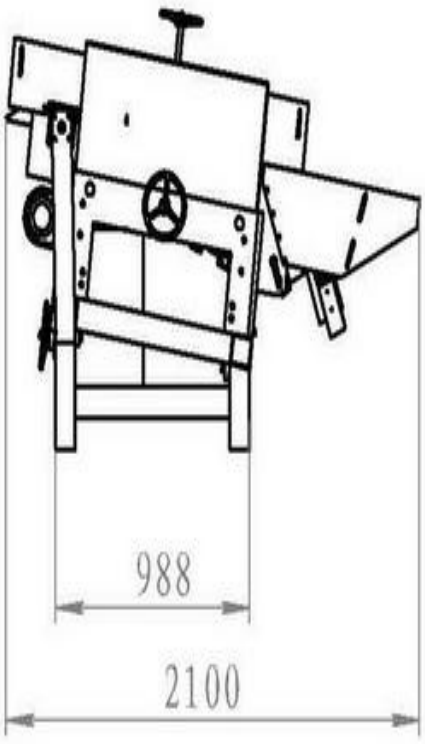


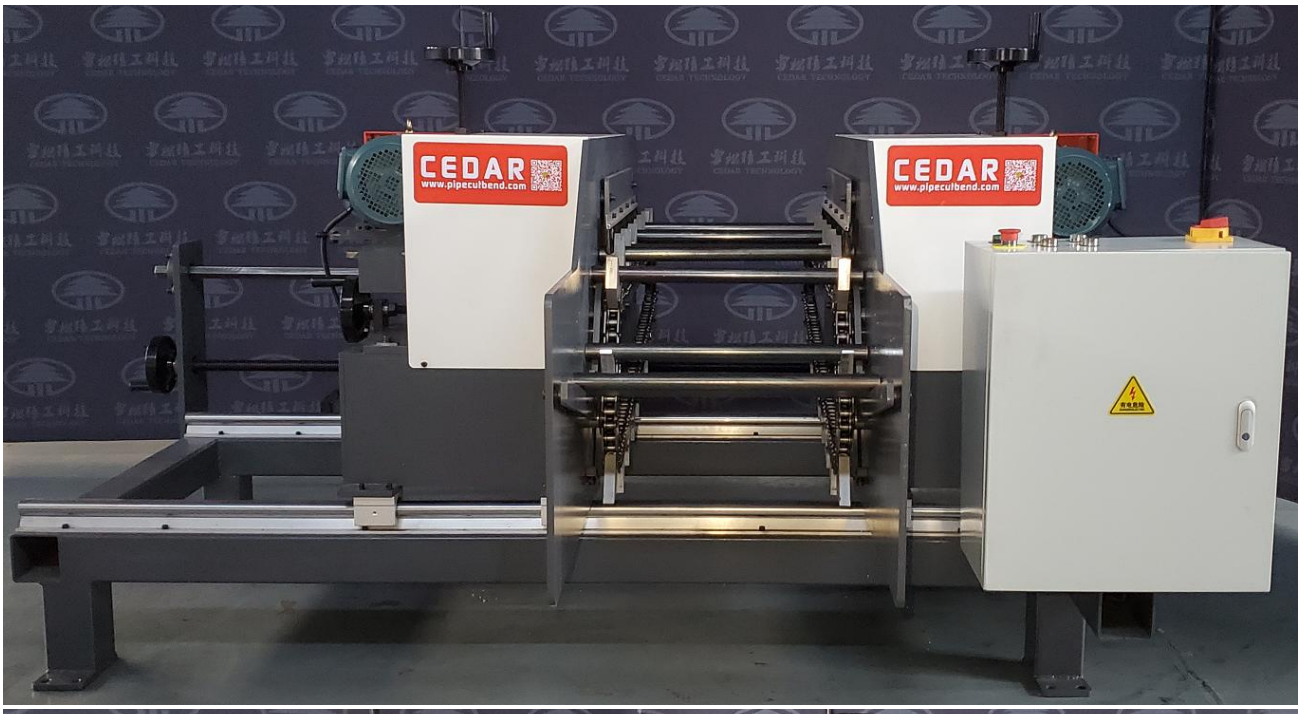


CEDAR
www.pipeculbend.com
CEDAR
www.pipeculbend.com


CEDAR
www.pipeculbend.com


CEDAR
www.pipeculbend.com
CEDAR
www.pipeculbend.com

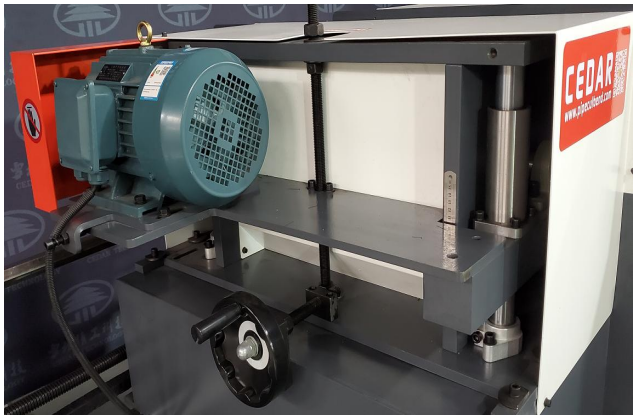
CEDAR
www.pipeculbend.com

Performance characteristics:

1. Equipped with automatic discharging, automatic feeding, automatic deburring and spring pressing device, the material operation is stable, light and efficient;

2. Bilateral two-way deburring makes the workpiece stable, the section smooth, low noise and low pollution;

3. One fixed head, movable head, suitable for processing products with different length specifications;

4. The screw type deburring machine is suitable for deburring round pipes. The material moves forward through the rotation of the chrome plated screw. The material will not be scratched, the material moves stably, and the burr removal is more complete;

5. Screw type deburring machine can deburr pipe fittings of large and small diameters within a certain range, with strong universality;

6. The machine starts and pauses through the button, without complex operation, and the function is simple and easy to learn;

7. The material transmission drives the reducer through the motor, which has stronger power, large diameter and thin wall;

This model is a deburring machine with automatic feeding, automatic deburring and automatic discharging. The equipment has simple structure, stable working principle and good deburring effect. It is suitable for all kinds of pipe fittings such as ordinary steel, stainless steel, copper and aluminum with various cross-section shapes. It is used for steel pipe furniture, pipe industry, sports equipment, tourism and leisure products, automobile, motorcycle, bicycle, baby carriage decoration, stainless steel iron decoration The best equipment for mass production in machining and other industries.

Parameters of automatic burring machine:

project	unit	XS-80S-2000 Full automatic deburring machine
 Round tube size	MM	12～80mm

□ Square tube size		17x17～70x70mm
Material length	MM	160-2000MM
Head motor power	KW	4.0*2 台
Head motor speed	转/分钟	1440
Conveying motor	KW	0.75KW 1:100 (Stepless transformation of conveying speed with frequency converter)
Moving motor speed	转/分钟	960
Steel brush diameter	MM	Φ300
Steel brush length	MM	455
Coupling length	MM	823
Standard guide rail		Flat guide rail: applicable to circular tube

		V-groove guide rail: applicable to square tube
Machine weight	KG	700
Machine dimensions	MM	3000*2100*1390

Configuration:

Serial number	name	brand
1、	Head motor	Joint venture guanshun *2
2、	Mobile motor	Joint venture guanshun *1
3、	Linear polished rod guide rail	Taiwan TBI
4、	Linear polished rod slider	Taiwan TBI
5、	transformer	Joint venture Jiuchuan
6、	switch power supply	Taiwan Mingwei

7、	Other electrical appliances	Joint venture Chint

Detailed equipment supply list:

Serial number	name	Specifications	quantity	remarks
1、	host machine		1/台	
2、	inner hexagon spanner	3-14	1/套	
3、	operation instructions		1/本	random file
4、	certificate of inspection/quality		1/张	random file

After-sales service:

1.Warranty period: We guarantee machine quality for one year, during this year, if spare parts of the machine were damaged, we can send the component to the customer by DHL, TNT freely.

2.Our factory can send our engineer to the customer's factory install, commission and training freely. The customer provide the double trip tickets, food and accommodation for our engineer. The customer also can send the

engineer to our factory to learn the operation and maintains freely.

3.Our factory provide the service for the customer forever, if the customer need operation help, can contact us by Skype,Whatsapp,WeChat, Email and Telephone at any time, we provide 24 hours on-line service.

Zhangjiagang City Cedar Technology Co., Ltd